


Series: PF33/PF50

POWER-FLO®
Pumps & Systems

Submersible Effluent/Sump Pumps
1½" Discharge, 1/2" Spherical Solids, 1/3 & 1/2HP

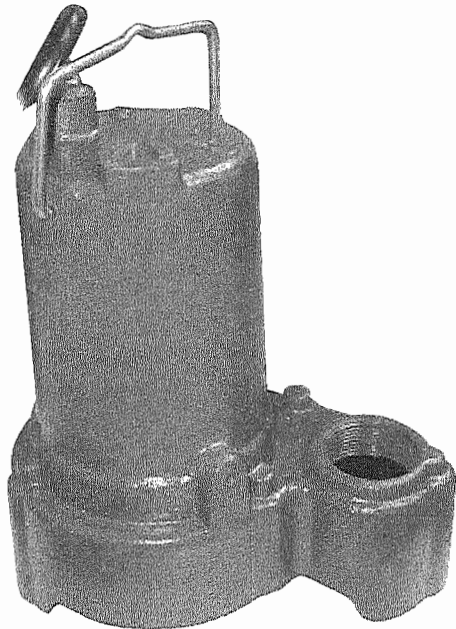

**Series: PF33, PF33X, PF33X-30
PF33A, PF33AX,
PF33AX-30, PF33VF,
PF33VFX, PF50X,
PF50AX, PF50VFX**

**1/3 & 1/2HP, 3450 RPM, 60 Hz
Submersible Sump Pumps**

Description

General purpose pump for residential, light industrial and commercial sump applications.

DISCHARGE	1-1/2" NPT, Female, Vertical
LIQUID TEMPERATURE	104°F Continuous
MOTOR HOUSING/ VOLUTE	Cast Iron, Class 30
STRAINER	Thermoplastic
IMPELLER	10 vane vortex, with pump out vanes on back side, Balanced. Material: Cast Iron
SHAFT	Stainless Steel
O-RINGS	Buna-N
HARDWARE	300 Series Stainless Steel
SEAL	Single Mechanical, Carbon/Ceramic/Buna-N
POWER CORD	10 Ft., 20 Ft., or 30 Ft. cord with plug
UPPER BEARING	Single Row, Ball, Oil Lubricated
LOWER BEARING	Single, Row, Ball, Oil Lubricated
MOTOR	Oil Filled, Class B insulation
SINGLE PHASE	Permanent Split Capacitor (PSC), Includes Overload Protection in Motor
PAINT	Powder Coated - Industrial Grade
LEVEL CONTROL- PF33:	(a) Manual, no float control & 10 ft long power cord with plug
PF33X & PF50X:	(b) Manual, no float control & 20 ft long power cord with plug
PF33A:	(c) Wide angle, mechanical & 10 ft long power cord with plug
PF33AX & PF50AX:	(d) Wide angle, mechanical & 20 ft long power cord with plug
PF33AX-30:	(e) Wide Angle, mechanical & 30 Ft long power cord with plug
PF33X-30:	(f) Manual, no float control & 30 Ft long power cord with plug
PF33VF:	(g) Vertical pvc float & 10 ft long power cord with plug
PF33VFX & PF50VFX:	(h) Vertical pvc float & 20 ft long power cord with plug
MIMIMUM SUMP DIAMETER	(a) 12" diameter: PF33, PF33X, PF50X, PF33VF, PF33VFX & PF50VFX (b) 18" diameter: PF33A, PF33AX & PF50AX



Series: PF33/PF50



Submersible Effluent/Sump Pumps
 1½" Discharge, 1/2" Spherical Solids, 1/3 & 1/2HP

