



Series: PFGPC-HH, HHS, HHSA HV, HVS, HVSA

**Submersible Grinder Pumps
1-1/4" Discharge, 2 HP, High-Head & High-Volume**



DISCHARGE	1-1/4" NPT Vertical, Bolt-on Flange
LIQUID TEMPERATURE	160°F Intermittent
VOLUTE	Cast Iron, Class 30
MOTOR HOUSING	Cast Iron, Class 30
SEAL PLATE	Cast Iron, Class 30
IMPELLER	12 Vane, Vortex, Bronze
SHREDDING RING	Stainless Steel
CUTTER	Stainless Steel
SHAFT	Stainless Steel
SQUARE RINGS	Buna-N
HARDWARE	Stainless Steel
PAINT	Powder Coated - Industrial Grade
POWER CORD	20 ft. Custom Molded, Pressure grommet for Sealing and Strain Relief. CSA approved, 12/3 Type SOW with Plug
MOTOR	Oil Filled, Squirrel Cage Induction, Class B Insulation
SINGLE PHASE	Capacitor Start/Capacitor Run, Included. Includes overload protection in the motor.
SINGLE SEAL MODELS - HVS & HHS	
SEAL	Outboard, Single Mechanical, Carbon/Ceramic/Buna-N
UPPER BEARING	Single row, Ball, Oil Lubricated
LOWER BEARING	Single row, Ball, Oil Lubricated
LEVEL CONTROL PFGPC2022HVSA/HHSA	"A" - Wide Angle, Mechanical Float, 20Ft Cord with Piggy-Back Plug, Normally Open. (230 Volt Models Only)
DOUBLE SEAL MODELS - HV & HH	
SEAL	Tandem Double Mechanical, Carbon/Ceramic/Buna-N
UPPER BEARING	Single row, Ball, Oil Lubricated
INTERMEDIATE BEARING	Single row, Ball, Oil Lubricated
LOWER BEARING	Sleeve, Oil Lubricated

Series:
PFGPC2002HVS & HHS
PFGPC2022HVS & HHS
PFGPC2022HVSA & HHSA
Single Seal

PFGPC2002HV & HH
PFGPC2022HV & HH
Double Seal

2 HP • 3450 RPM • 60 Hz
Submersible Grinder Pump

NOTE: Consult factory before making modifications as they may effect CSA listing.

Description

Designed to reduce domestic, commercial, institutional and light industrial sewage to a finely ground slurry.




Series: PFGPC-HH, HHS, HHSA HV, HVS, HVSA



Submersible Grinder Pumps 1-1/4" Discharge, 2 HP, High-Head & High-Volume

IMPORTANT! - Pump Suction **MUST** be a minimum of 4" from basin floor with use of legs, stand or slide rail system.

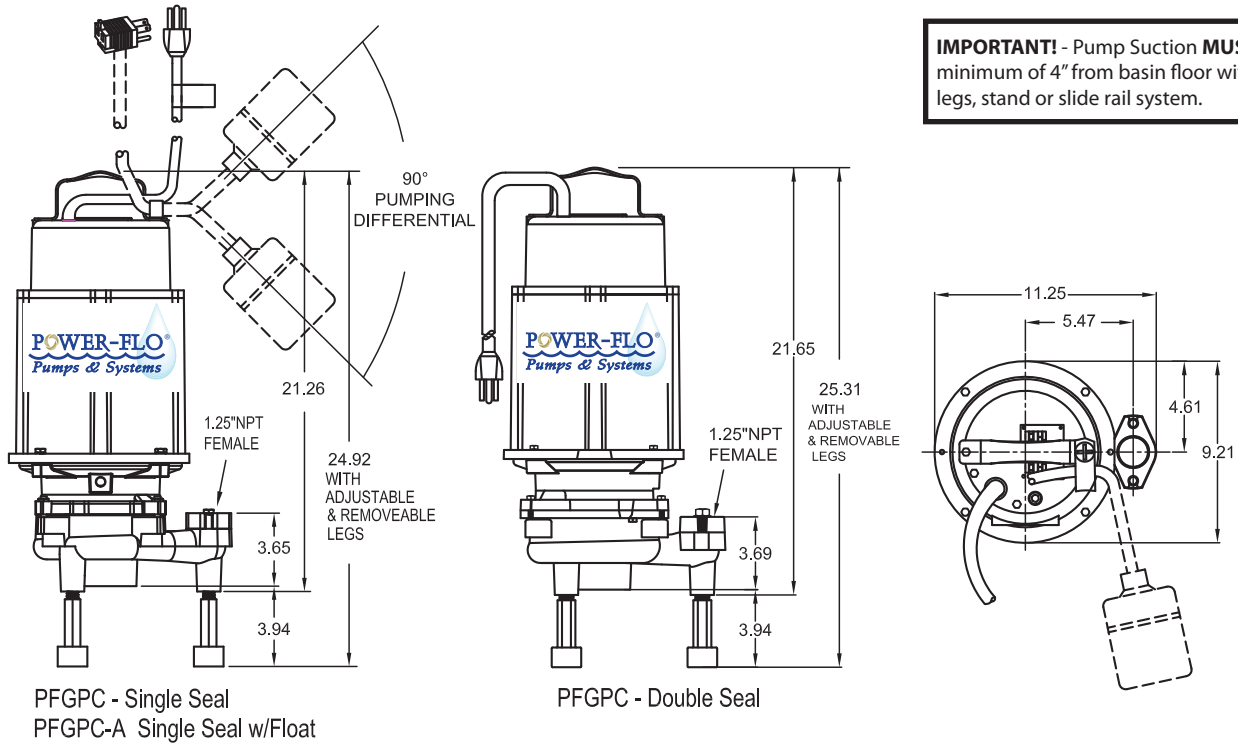

PFGPC - Single Seal
PFGPC-A Single Seal w/Float

PFGPC - Double Seal

MODEL	HP	Hz	Volts/Ph	RPM	Full Load Amps	Locked Rotor Amps	NEMA Start Code	Cord Type	Cord Size	Cord O.D.
High Volume - Single Seal Series										
PFGPC2002HVS	2	60	200/1	3450	17.0	53.0	F	SOW	12/3	.67
PFGPC2022HVS	2	60	230/1	3450	15.0	53.8	H	SOW	12/3	.67
PFGPC2022HVSA	2	60	230/1	3450	15.0	53.8	H	SOW	12/3	.67
High Head - Single Seal Series										
PFGPC2002HHS	2	60	200/1	3450	17.0	53.0	F	SOW	12/3	.67
PFGPC2022HHS	2	60	230/1	3450	15.0	53.8	H	SOW	12/3	.67
PFGPC2022HHSA	2	60	230/1	3450	15.0	53.8	H	SOW	12/3	.67
High Volume - Double Seal Series										
PFGPC2002HV	2	60	200/1	3450	17.0	53.0	F	SOW	12/3	.67
PFGPC2022HV	2	60	230/1	3450	15.0	53.8	H	SOW	12/3	.67
High Head - Double Seal Series										
PSGPC2002HH	2	60	200/1	3450	17.0	53.0	F	SOW	12/3	.67
PFGPC2022HH	2	60	230/1	3450	15.0	53.8	H	SOW	12/3	.67


IMPORTANT!

These pumps are not approved for use in swimming pools, recreational water parks, or installations where human contact with pumped media is a common occurrence.



Series: PFGPC-HH, HHS, HHSA

**Submersible Grinder Pumps
1-1/4" Discharge, 2 HP, High-Head**

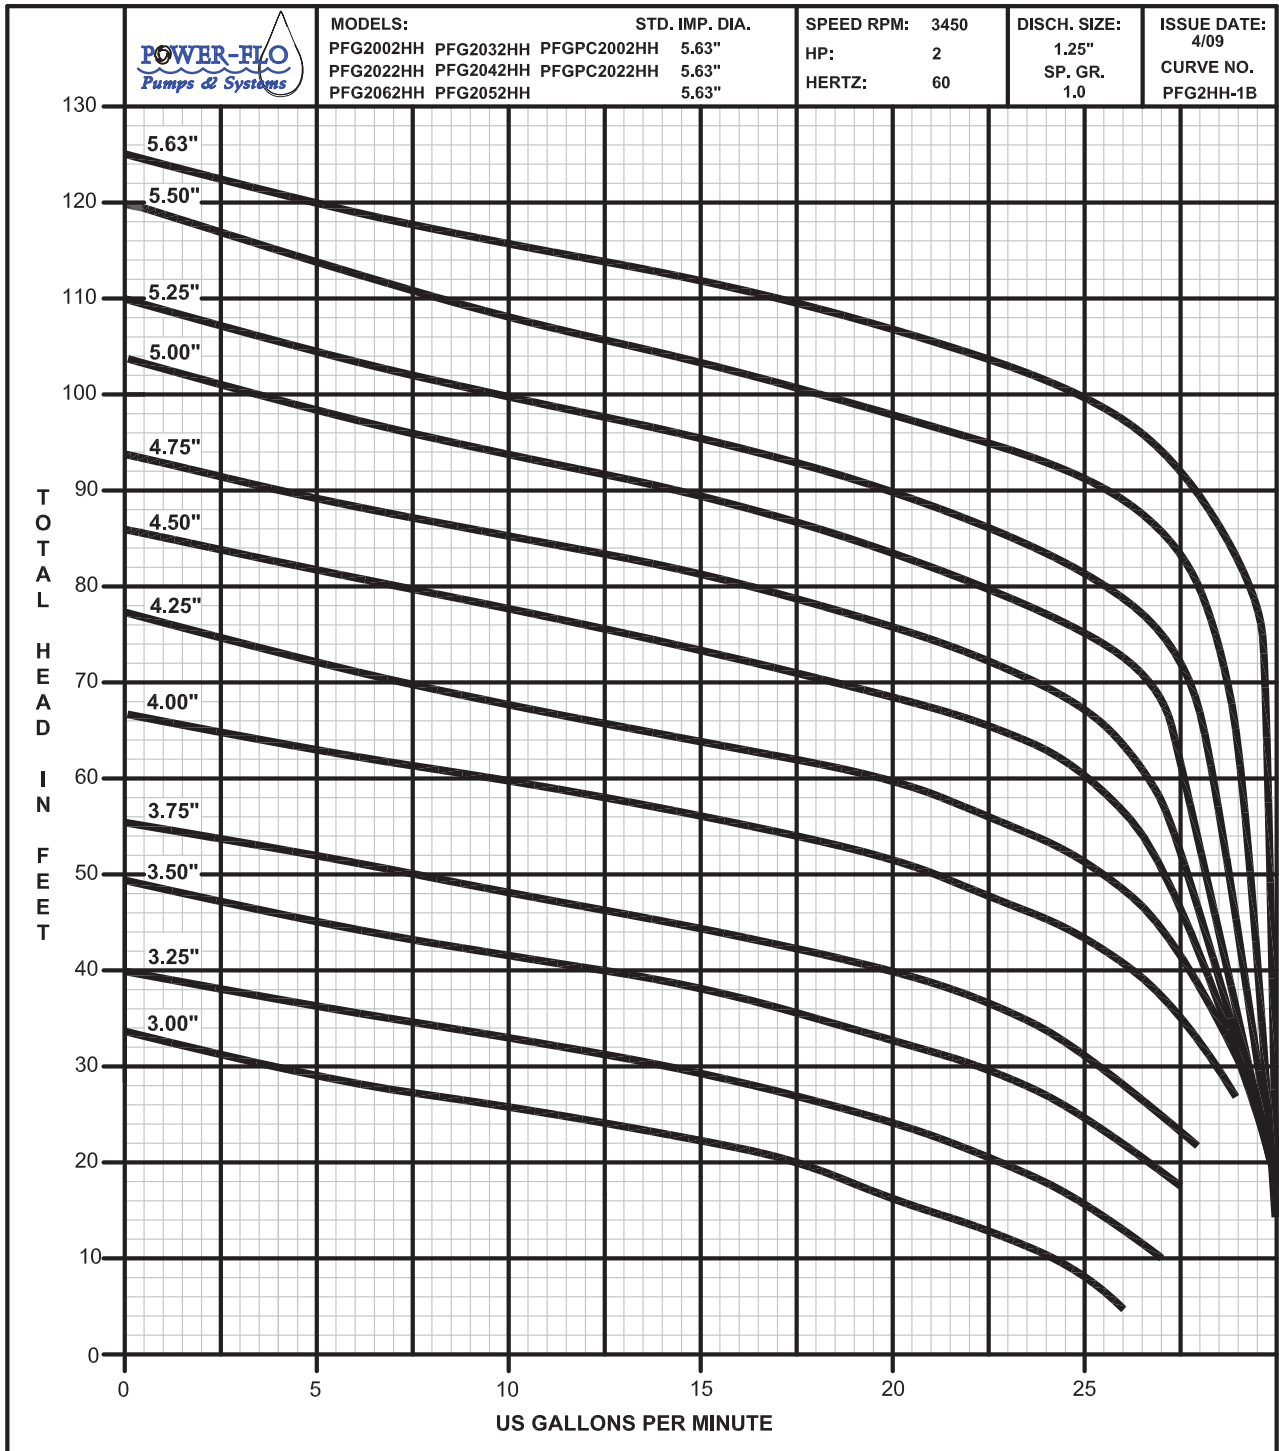

Series: PFGPC-HV, HVS, HVSA



Submersible Grinder Pumps
1-1/4" Discharge, 2 HP, High-Volume

